

TUNG OIL

Property & Usage

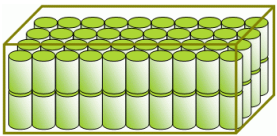
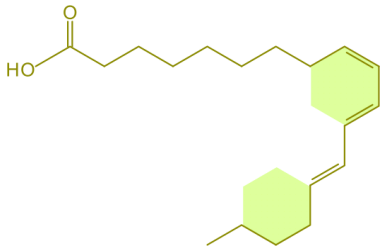
SumTac™ Tung Oil is natural plant oil is pressed & extracted from the seeds of tung tree at the oil mill. It consists primarily of the glycerides of the fatty acids linoleic acid and oleic acid. As Chinese traditional export item, it's also named as China wood oil. Tung oil is a kind of superior drying oil and features fast volatility & drying, high gloss, strong adhesion, good resistance to heat, acid, alkali, rot & rust, non-conductive electricity, etc.

Usage as basic important raw material in raw lacquer, varnish, paint, PCB(Printed Circuit Board) & CCL (Copper Clad Laminate), alkyd resin, etc.

Technical Data Sheet (TDS-9000)

TUNG OIL	EXPORT GRADE
Appearance	transparent or slightly turbid
Color	not darker than a freshly prepared solution containing 0.4gm potassium dichromate in 100ml of sulphuric acid (s.g. 1.84).
Specific gravity (20 deg C/4 deg C)	0.9360 - 0.9395
Refractive index (20 deg C)	1.517 - 1.522
Iodine value	163 - 173
Saponification value	190 - 195
Moisture & impurities	0.3% max.
Free fatty acid (FFA)	4% max.
Worstall's heat test	7.5 minutes max.
Beta tung oil test	negative (no crystalline precipitate)
* Color in accordance with Gardner no. 8 max available.	

Package & Notes

Package 190kg net iron drum	20'FCL load 15.2mt (80drums)	
Structural - $(C_{17}H_{29}COO)_3C_3H_5$ 	CAS Number 8001-20-5	EC# (EINECS#) 232-272-3
	HS Code 15159030	Standard GB 8277-87
	Storage In cool place, avoid fire and high temperature.	

